


# Self-Tapping Screws *Coarse Thread Drywall & Particle Board Screws* Bugle Head

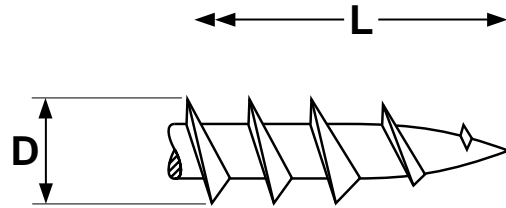

Coarse Thread Drywall & Particle Board Screw

THREADS FOR COARSE THREAD DRYWALL AND PARTICLE BOARD SCREWS			
Screw Size	Threads per inch	D	
		Major Diameter	
		Max.	Min.
6	8	.154	.142
7	8	.172	.159
8	8	.180	.163
10	8	.210	.180
<b>Tolerance on Length</b>		Up to 1 in. incl.: -0, +0.060	Over 1 in.: -0, +0.100

<b>Description</b>	<i>Coarse thread Drywall--Sharp point:</i> A bugle head screw with spaced threads, extra sharp point and black phosphate finish.	<i>Particle Board Screw:</i> Same as a coarse thread drywall screw but available in shorter lengths than standard drywall screws.
<b>Applications/ Advantages</b>	<i>Coarse thread Drywall--Sharp point:</i> For attaching drywall to wood studs or to 25 gage metal studs.	<i>Particle Board Screw:</i> Designed specifically for use in dense woods, especially man-made types such as chipboard and particle board.
<b>Material</b>	AISI 1018 or equivalent steel	
<b>Heat Treatment</b>	Screws shall be quenched in liquid and then tempered by reheating to 650°F minimum.	
<b>Case Hardness</b>	Rockwell C 44 minimum	
<b>Plating</b>	See Appendix-A for information about the coatings of drywall and particle board screws.	