


POZIDRIV® (1A) FLAT HEADS FOR MACHINE SCREWS													ASME B18.6.3-1998	
Nominal Size	A		H		M	R	N	Recess Penetration Gaging Depth		F		G	Driver Size	
	Head Dimensions				Recess Dimensions					Protrusion Above Gaging Diameter		Gaging Diameter		
	Diameter		Height		Diam.	Depth	Width			Max	Min			Max
	Max	Min	Max	Min	Ref	Ref	Ref	Max	Min	Max	Min			
2	.162	.144	.051	.040	.096	.055	.029	.053	.037	.029	.017	.124	1	
4	.212	.191	.067	.055	.122	.081	.030	.079	.063	.032	.019	.172	1	
6	.262	.238	.083	.069	.168	.098	.041	.091	.073	.036	.021	.220	2	
8	.312	.285	.100	.084	.182	.112	.041	.107	.089	.039	.023	.267	2	
10	.362	.333	.116	.098	.198	.127	.041	.122	.104	.042	.025	.313	2	
12	.412	.380	.132	.112	.262	.149	.056	.136	.118	.045	.027	.362	3	
1/4	.477	.442	.153	.131	.276	.164	.057	.151	.133	.050	.029	.424	3	
5/16	.597	.556	.191	.165	.358	.211	.086	.193	.175	.057	.034	.539	4	
3/8	.717	.670	.230	.200	.386	.239	.086	.222	.204	.065	.039	.653	4	

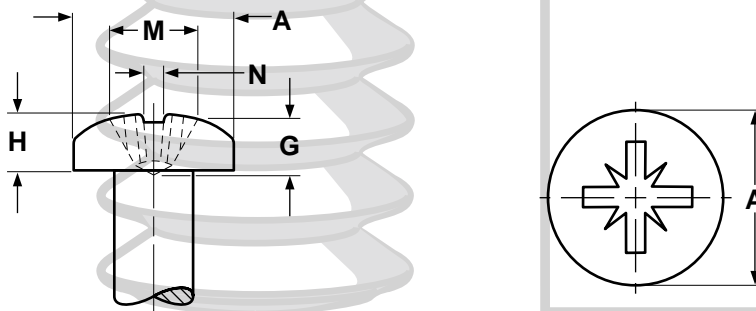

POZIDRIV® (TYPE 1A) PAN HEADS FOR MACHINE SCREWS													ASME B18.6.3-1998	
Nominal Size	A		H		M		G		N	Recess Penetration Gaging Depth		Driver Size		
	Head Diameter		Height of Head		Dimensions of Recess									
					Diameter		Depth						Width	
	Max	Min	Max	Min	Max	Min	Max	Min	Min	Max	Min			
2	.167	.155	.062	.053	.104	.091	.064	.048	.028	.053	.037	1		
4	.219	.205	.080	.070	.122	.109	.083	.067	.029	.072	.056	1		
6	.270	.256	.097	.087	.162	.149	.092	.074	.040	.076	.058	2		
8	.322	.306	.115	.105	.177	.164	.108	.090	.041	.092	.074	2		
10	.373	.357	.133	.122	.193	.180	.124	.106	.041	.108	.090	2		
12	.425	.407	.151	.139	.254	.241	.139	.121	.056	.117	.099	3		
1/4	.492	.473	.175	.162	.273	.260	.159	.141	.057	.137	.119	3		

®Pozidriv is a registered trademark of the Phillips Screw Company. Kanebridge's fasteners with a 1A-drive are not manufactured by or connected with the producers of Pozidriv® fasteners.