


Self-Tapping Screws


Deck Screws

Phillips Recess Square Recess

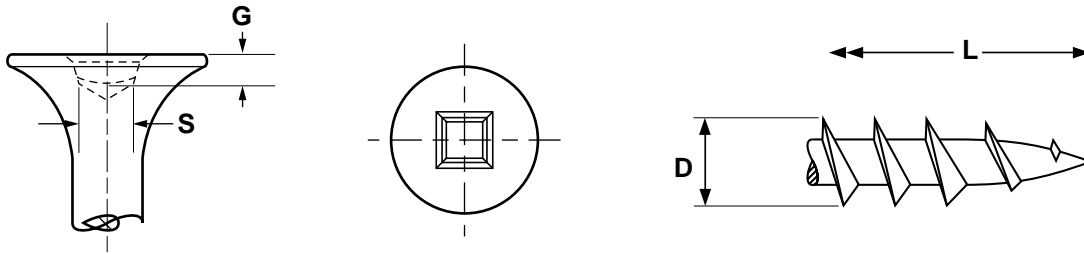

SQUARE RECESS COARSE THREAD DECK SCREWS

Screw Size	Threads per inch	D		S		G		Drive Size
		Major Diameter		Recess Square		Penetration Gaging Depth		
		Max.	Min.	Max	Min	Max	Min	
6	10	.154	.142	.091	.089	.065	.056	1
8	8	.180	.163	.113	.110	.075	.064	2
10	8	.210	.180	.113	.110	.075	.064	2
Tolerance on Length		Up to 1 in. incl.: -0, +0.060				Over 1 in.: -0, +0.100		

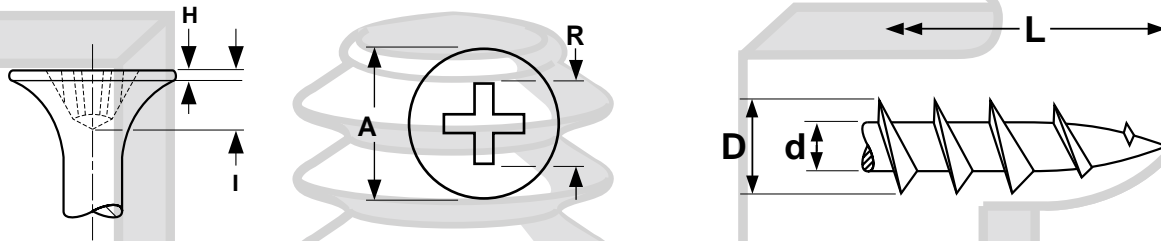

PHILLIPS RECESS COARSE THREAD DECK SCREWS

Screw Size	Threads per inch	D		R		I		Phillips Recess Depth
		Major Diameter		Phillips Recess Diameter		Phillips Recess Depth		
		Max.	Min.	Max.	Min.	Max.	Min.	
6	10	.154	.142	.201	.176	.116	.093	2
8	8	.180	.163	.201	.176	.116	.093	2
10	8	.210	.180	.204	.190	.125	.098	2
Tolerance on Length		Up to 1 in. incl.: -0, +0.060				Over 1 in.: -0, +0.100		

NOTE: There is no single standard for deck screw dimensions. These values are offered as a guide; deviations from these specifications may occur.

	<i>Steel</i>	<i>Stainless</i>
Description	A bugle head screw with spaced threads, extra sharp point and dactrotized finish.	A bugle head screw with spaced threads and extra sharp point, manufactured of corrosion-resistant stainless steel.
Applications/ Advantages	Designed specifically for joining pieces of pressure treated lumber. Provides corrosion resistance superior to phosphate-coated drywall screws without discoloring the wood. The square drive recess is preferred by some for its excellent torque transmission and resistance to cam-out problems.	Designed specifically for joining pieces of pressure treated lumber. Remains resistant to corrosion for approximately twice as long as do dactrotized steel deck screws.
Material	AISI 1018 or equivalent steel	18-8 passivated stainless steel
Hardness	HV 550 - 800	Rockwell B 85 - 95
Plating	Steel deck screws have a dactrotized finish.	Stainless deck screws require no additional coating.